
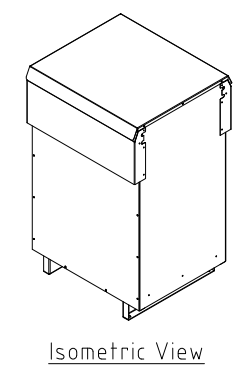


Rev. No.	Revision Note	Date	By	Checked
A25	REVISED REACTOR AND CAPACITOR BOARD DESIGN	29-JAN-2018	CG	BDK
A26	REVISED REACTOR AND CAPACITOR BOARD DESIGN	05-DEC-2019	CG	BDK

Connection Diagram

UNIT SPECIFICATIONS				INPUT	OUTPUT	APPROX. WT
HP [kW]	PHASE	VOLTS	Hz	AMPS	kW	lb [kg]
350 [250]	3	480	60	395	292	900 [409]

NOTES:
 1. Customer is responsible for installation to meet all national and local electrical codes and other applicable electrical safety authorities.
 2. Type 3R Enhanced enclosure suitable for outdoor installation. Only front access is required but minimum 6" clearance should be provided at rear for proper ventilation.

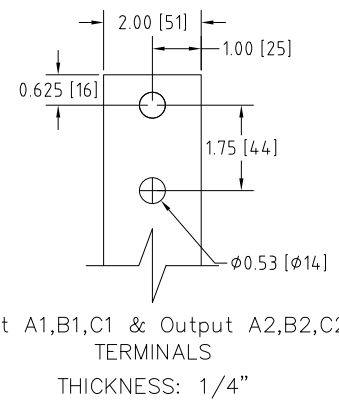

MIRUS International Inc.

31 Sun Pac Boulevard, Brampton, ON, Canada L6S 5P6
 Tel: (905) 494-1120 Fax: (905) 494-1140 Toll Free: 1-888-TO MIRUS

Unless otherwise specified, dimensions are in inches and [mm].	Drawn By XYZ	Date Created 09-MAR-10	Checked by YM	Approved by - date YM-09-MAR-10	Scale NTS
The information contained herein is the sole property of MIRUS International Inc. Any form of reproduction, distribution and/or disclosure of this information, all or in part, is strictly prohibited without the express written consent of MIRUS International Inc.			Title 350 HP, 480 V, 60 Hz LINEATOR™ AUHF (Type-3R Enh.)		
			Filename AUHF-350-480-60-D-E1E-A26	Revision A26	Sheet 1/1